

Colenta[®] Imageline Plate[®]

**For AGFA SilverLithoStar CTP - Printing Plates
IMAGELINE PLATE - TYPE ILP 68 LS/OL
for DAINIPPON SCREEN PF-R 1050**



The Colenta Lithostar Processors are well proven and fully endorsed/accredited by Agfa as meeting their high standards in plate quality, reliability and production specifications. A copy of the Agfa accreditation is available on request.

The Agfa accreditation details the following features of the Colenta Lithostar design:

- * Approved for 300 / 75 sq/mt plates per day
- * A Robust design with ease of operation.
- * Fully compatible and adaptable „on-site“ to Concept 7 Lithostar Plate when available.
- * A sophisticated Control software monitors and manages the varying range of production conditions in respect to replenishment requirements (including standby and sleepmode replenishment) ensuring a stable plate developer and consistent good quality production.




COLENTA ILP 68 LS/OL for Dainippon Screen PF-R1050

Standard Features and accessories:

- In-built Chiller unit
- Prepared for Integrated Stacker (Online model)
- Low Level monitoring of Dev, Wash, Rinse and Finisher Tank solutions.
- Automatic Solution Tank „Top-Up“ control on „Start-Up“
- High level monitoring in overflow collection tank (waste management)
- Low Level Replenishment Tank monitoring.
- Re-Wash Feed Facility
- „Safe Loading“ control
- „Work in Progress“ monitoring
- Online Interface



A drawer unit within the main frame to house the replenishment and waste collection tanks. (waste management)

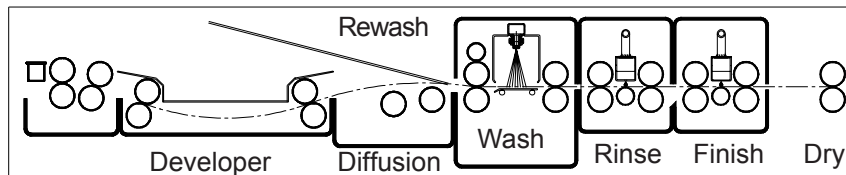

Technical Specifications:

Processing applications:

Plate width:

Microprocessor Control:

**Transport Speed at 20 sec DEV-Time:
(Time in Dev. plus Diffusion Time 20sec:)**

AL-CTP AGFA SilverLithoStar
max. 68 cm
with 4 preprogrammable processing cycles
and 1 overnight program (SLEEPMODE)
170cm/min - 67 inch/min
preprogrammable 16 to 80 sec.
(recommended by AGFA 35sec/100cm/min)

	Tankcapacity ILP 68	Temperature
Developer	12 lt	15 - 45°C
Wash	11 lt	18 - 55°C
Rinse	5 lt	18 - 55°C
Finisher	5,5 lt	18 - 55°C
Dryer	-	18 - 60°C
Electrical supply: at 3N-400/230V	6KW 13 A	

(possible alternatives are available on request)

Weight:	Empty	350 kg
	With solution	385 kg

Microprocessor
controlled Display



see additional
Data sheet:
G4-10

Technical specification subject
to change without notice.

COLENTA LABORTECHNIK
Ges.m.b.H. & Co. KG
Neunkirchner Strasse 117
A-2700 Wiener Neustadt
Tel.: +43-2622-28311-0
Fax: +43-2622-28311-7
E-mail: office@colenta.at
<http://www.colenta.at>

ACI-COLENTA
INTERNATIONAL Div.
Forge Close, Little End Rd,
Eaton Socon, Cambs. UK
Tel. +44-1480-211118
Fax: +44-1480-215236
Fax: +44/870/132 1352
E-mail: aci@patflaherty.com